


Clay Tile Selector


Machine Made, Handmade & Handcrafted Roof Tiles

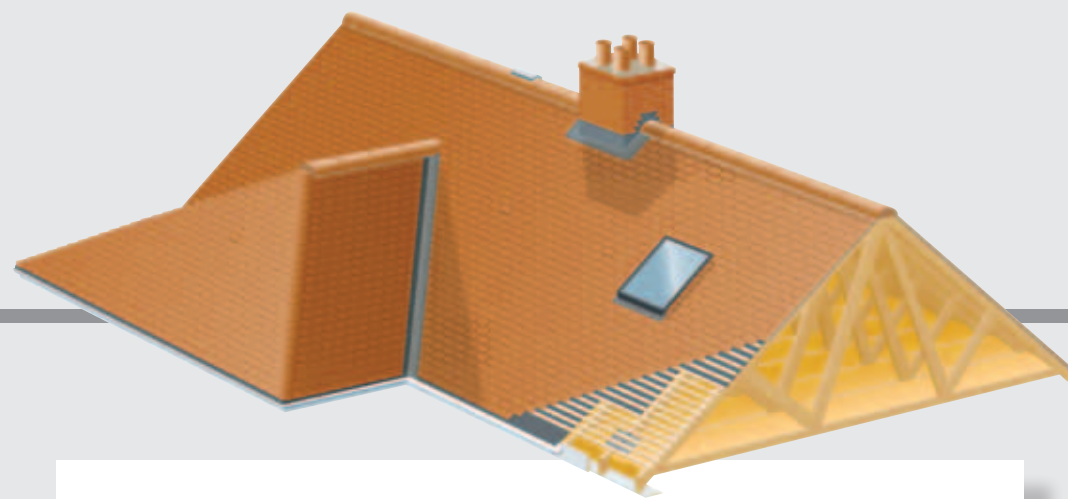

Pitched Roofing

We also stock a wide range of specialist fixings and roofing accessories, including:

- Batten
- Dry fix systems
- Insulation
- Ridges, hips and other fittings
- Ventilation
- Underlays
- Decorative finials
- Roof windows
- Lead
- Chimney pots

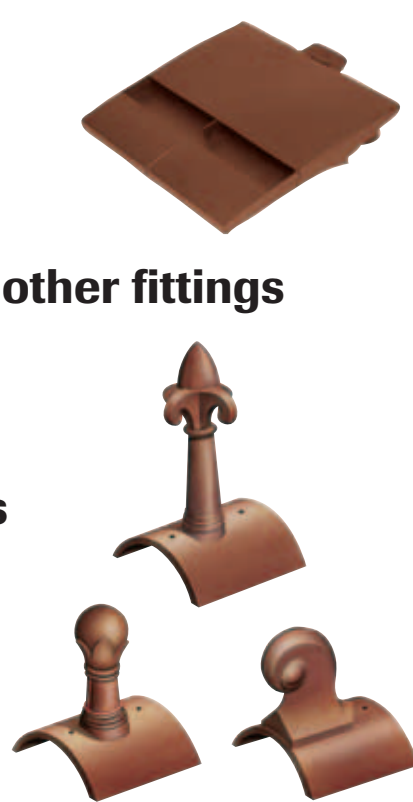

Your local branch

SIG Roofing,
Harding Way, St Ives,
Cambridgeshire,
PE27 3YJ

Tel: 01480 466777
Fax: 01480 290133

Email: info@sigroofing.co.uk
Web: www.sigroofing.co.uk

This brochure has been produced by the Marketing Department at SIG Roofing. All rights reserved. No copying by any means is permitted, except where permission is given in writing by SIG Roofing.

This brochure contains manufacturers' product information that is reproduced by SIG Roofing in good faith, based on the latest knowledge available at the time of going to print. Whilst every effort has been made to ensure that the information is correct and correct, no distribution SIG Roofing cannot accept responsibility for the application and specification data featured. Neither can we accept responsibility where the manufacturer's representations have not been followed. We reserve the right to amend, withdraw or substitute these products at any time. Visuals are for illustration purposes only, please go to manufacturers websites for technical specifications.

07/15/11

Timber

Fully certified and approved

We have a range of quality graded roofing batten in different lengths and thicknesses that are BS5534:2014 compliant, recognised by controlling bodies, local authorities and home warranty providers such as the NHBC.

Ensuring that you have the very best material and total peace of mind, our supply partners' Premium Gold Roof Battens are underpinned by a 60-year product warranty (speak to your branch for more information).




Dry Fix Ridge Kits

Make sure you are BS5534: 2014 compliant

Available nationwide at SIG Roofing branches, the TIL-R Dry Fix Ridge Kit is a universal solution, suitable for use with most conventional ridge tiles, and can be used on hips in conjunction with hip trays.

The TIL-R Dry Fix Ridge kit is lightweight, safe and simple to install, ventilated to BS5534 requirements. The minimal number of components provide secure fixing against the weather, with easy alignment and a discreet appearance.

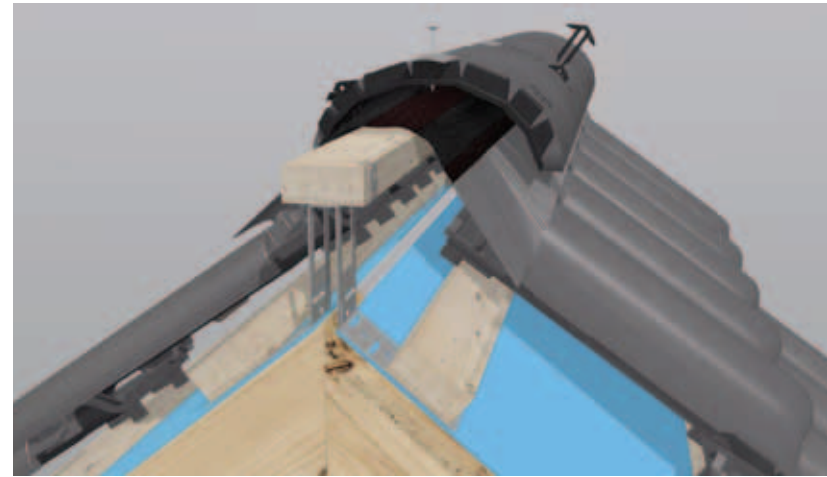


TIL-R

Ventilation

Solutions for all of your ventilation needs

SIG Roofing supply a full range of ventilation products from outlets, to slate vents, breather membranes and eaves ventilation.

We offer a range of simple and effective solutions to provide air paths into the roof space. Our ranges allow ventilation through the ridge, hips, verges and weep tiles, as well as the fascia, eaves and soffits.

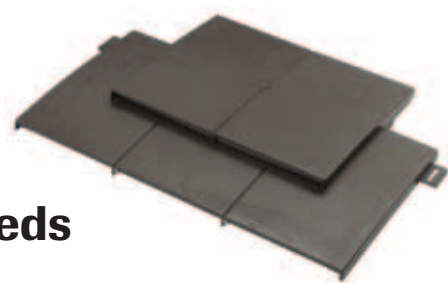

Choice and Variety in Clay Tiles

HANDCRAFTED

PLAIN TILES		Product name	Coverage per m ² *	Min. roof pitch	Battens per linear m ²	Nail size for tiles (mm)	Nail material												
	Sandtoft	311 Plain Tile	61	35°	10	38 x 3.35	ARS												
		Alban	60	35°	10	38 x 3.35	A												
		Barrow	60	35°	10	38 x 3.35	A												
	Redland	Rosemary Craftsman	60	35°	10	38 x 3.35	A												
	MarleyEternit	Ashdowne	60	35°	10	38 x 3.35	A												
	TERREAL	Priory	60	35°	10	38/40 x 2.65	A												
	Dreadnought	Handformed Range	60	35°	10	38 x 2.65	A												
		Rustic Range	60	35°	10	38 x 2.65	A												
	Nail key: A - Alloy ARS - Aluminium Ring Shank SSRS - Stainless Steel Ring Shank Finshes: S Smooth SF Sand Faced W Weathered *(at 100mm headlap)																		

HANDMADE

PLAIN TILES		Product name	Coverage per m ² *	Min. roof pitch	Battens per linear m ²	Nail size for tiles (mm)	Nail material												
	SIGNATURE	SIGNature	60	35°	10	38 x 3.35	ARS												
	Sandtoft	Goxhill	60	40°	10	38 x 3.35	ARS												
	KEYMER	Shire	60	40°	10	38 x 3.35	ARS												
		Traditional	60	40°	10	38 x 3.35	ARS												
	MarleyEternit	Canterbury	60	40°	10	38 x 2.65	A												
	William Wright	Plain	60	35°	10	38 x 3.35	ARS												

PROFILED TILES	William Wright	Corrugated	17.5	30°	5	38 x 3.35	ARS												
		French	17.5	30°	5	38 x 3.35	ARS												

TRADITIONAL PANTILES	Sandtoft	Greenwood	17	30°	3.7	50 x 3.35	ARS												
	William Wright	Barco	17.5	30°	5	38 x 3.35	ARS												
		Lincoln	17.5	30°	5	38 x 3.35	ARS												

Nail key: A - Alloy ARS - Aluminium Ring Shank SSRS - Stainless Steel Ring Shank Finshes: S Smooth SF Sand Faced W Weathered *(at 100mm headlap)																		
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Photographic qualities may vary from definitive colours; for more accurate colour matching, please obtain samples. For up to date technical information and fixing specifications please check with manufacturers' technical services or website. These details are correct at the time of print but may be subject to change without notice.

